


## WEIGHT INDICATOR MOD. 350

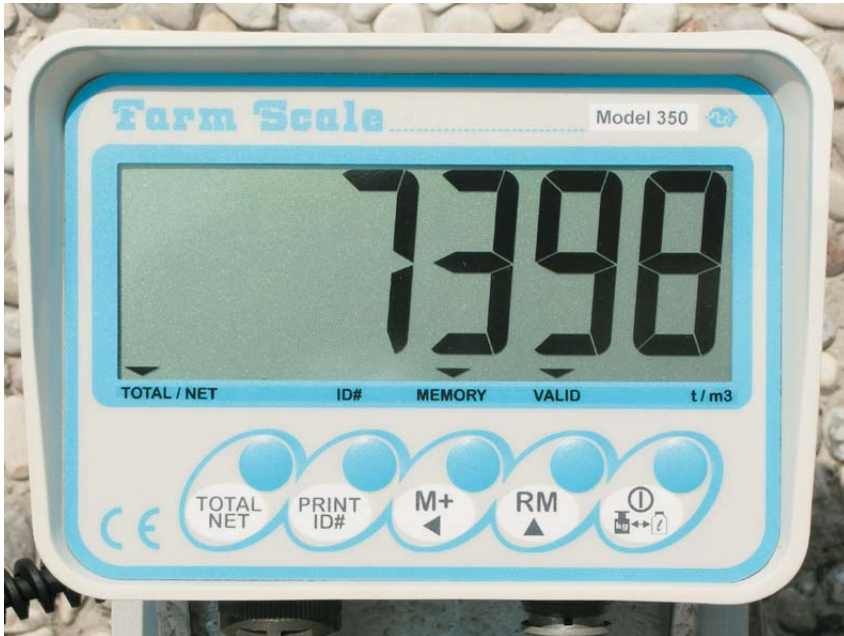

*It can be used on the following systems:*

- *milktanks*
- *platforms/silos*
- *animal cages*
- *static mixers*

### Main operational and technical features

- Weight direct reading, partial and total weighing, memory storage
- Weight display: backlit LCD (5 digits h 40 mm)
- Function keys on the frontal panel
- Switching, calibration, tare, print and battery test by keys
- Entry and modification of product or animal identification number
- MIL type connectors for power supply and load cells
- Compact ABS box
- Power supply 12 Volts 0,3 Amp
- Working temperature: -10°C / +40°C
- Increment: .1 - .2 - .5 - 1 - 2 - 5 - 10 - 20 Kg
- StarBus output for possible connection to printer and/or remote display

### Special functions for milktank

- Weight visualization in Kg or in Litres
- Setting of automatic print time